




TRENCH CUTTER



Excellent suited for creating
trenches for broadband
(fibre optic cable).

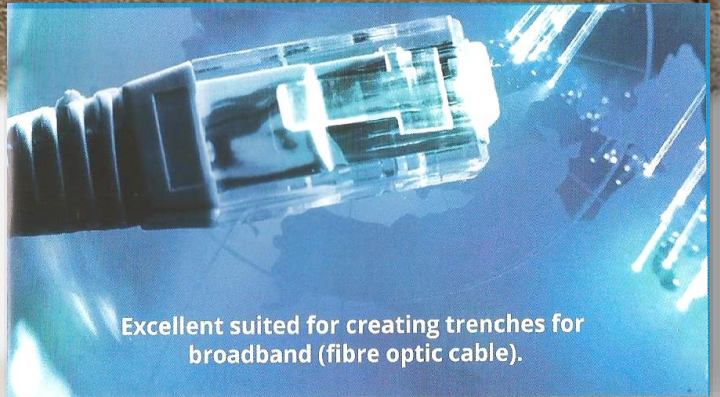

Excellent suited for creating trenches for
broadband (fibre optic cable).



TRENCH CUTTER

Spezialmaschinen
Stehr

Made In Germany



**More economical and powerful than a self-propelled cutter.
Direct drive via PTO shaft, enormous torque.**

**Exact trench walls
and performance up
to 10x greater
compared to an
excavator**

**Option available fitted
with conveyor belt.**



Less wear than a Milling Chain

TRENCH CUTTER

SGF-600-150

Grinding Depth: 600 mm

Grinding Width: 150mm

(Other width on request)

Power Required: 100-135 HP Agriculture Tractor through mechanically driven PTO with safety clutch at 1000 RPM.

Weight: 1550 Kgs.

Torque: 1500 Nm

Equipped with round shank of chisels and changeable milling segments.

Milling Teeth: Carbide

Milling Teeth Housing: Hardox 400

Quick Change device optional with the machine.

Laying device for cables, conduits etc. Optional with machine.

SGF 600-150 Trench Cutter

Power requirement : from 100 -130 hp

- Grinding depth max. 600 mm
- Grinding width: 150 mm



SGF-800

Grinding Depth: 800mm

Grinding Width: 200mm

(Other width on request)

Power Requirement: 135 HP to 200 HP Agriculture Tractor through mechanically driven PTO with safety clutch at 1000 RPM.

Weight: 2520 Kgs

Torque: 2200 Nm

Equipped with round shank of chisels, and changeable milling segments.

G) Milling Teeth: Carbide

H) Milling Teeth Housing:

Hardox 400

Quick Change device optional with the machine.

J) Laying device for cables, conduits etc. Optional with machine.

SGF 800 Trench Cutter

Power requirement : from 135-200 hp

- Grinding depth max. 800 mm
- Grinding width: 200 mm



TRENCH CUTTER



Made In Germany

SGF-1300

Grinding Depth: 1300 mm

Grinding Width: 350 mm

Power Required: 240-360 HP

Agriculture Tractor through

mechanically driven PTO with safety clutch at 1000 RPM.

Weight: 4615 Kgs.

Torque: 1500 Nm

Equipped with round shank of chisels and changeable milling segments.

Milling Teeth: Carbide

Milling Teeth Housing: Hardox 400

Quick Change device optional with the machine.

Laying device for cables, conduits etc. Optional with machine.

SGF-1300 Trench Cutter

Power requirement : from 240-360 hp

- Grinding depth max. 1300 mm
- Grinding width: 350 mm



 **ALLEN BUILDWELL
PRIVATE LIMITED**

Mumbai Sales Office: B 206, Arjun Centre,
Govandi (E), Mumbai-88. India.

Landline: 022 -25569044, 25513030

Web Site: www.allenbuildwell.com

Email: info@allenbuildwell.com; sales@allenbuildwell.com

Mumbai Sales: 8422892959